

**Department of Electrical Engineering**  
**Final – Term Assignment Spring 2020**

**Date: 22/06/2020**

**Course Details**


**Course Title:** Computer Communication Network  
**Instructor:** muhammad waqas

**Module:** 06  
**Total Marks:** 50

**Student Details**

**Name:** noor ul wahab

**Student ID:** 12395

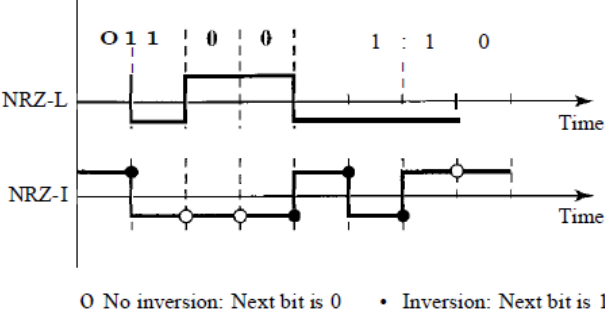Q1.	(a)	<p>1. An NRZ-I signal has a data rate of 100 Kbps. Using the following Figure, calculate the value of the normalized energy (P) for frequencies at 0 Hz, 50 KHz, and 100 KHz.</p>  <p style="text-align: center;">O No inversion: Next bit is 0    • Inversion: Next bit is 1</p> <p>2. What is the Nyquist sampling rate for each of the following signals?</p> <ol style="list-style-type: none"> <li>A low-pass signal with bandwidth of 200 KHz?</li> <li>A band-pass signal with bandwidth of 200 KHz if the lowest frequency is 100 KHz?</li> </ol> <p>3. We have sampled a low-pass signal with a bandwidth of 200 KHz using 1024 levels of quantization.</p> <ol style="list-style-type: none"> <li>Calculate the bit rate of the digitized signal.</li> <li>Calculate the SNRdB for this signal.</li> <li>Calculate the PCM bandwidth of this signal.</li> </ol> <p>4. What is the maximum data rate of a channel with a bandwidth of 200 KHz if we use four levels of digital signaling.</p>	<p>Marks 20 CLO 1</p>
Q2.	(a)	<p>Draw the graph of the NRZ-L, NRZ-I, Manchester and differential Manchester scheme using each of the following data streams</p> <ol style="list-style-type: none"> <li>01010101</li> <li>00110011</li> </ol>	<p>Marks 16 CLO 1</p>
Q3.	(a)	<ol style="list-style-type: none"> <li>A TV channel has a bandwidth of 6 MHz. If we send a digital signal using one channel, what are the data rates if we use one harmonic, three harmonics, and five harmonics?</li> <li>A signal travels from point A to point B. At point A, the signal power is 100 W. At point B, the power is 90 W. What is the attenuation in decibels?</li> <li>The attenuation of a signal is -10 dB. What is the final signal power if it was originally 5 W?</li> <li>A signal has passed through three cascaded amplifiers, each with a 4 dB gain. What is the total gain? How much is the signal amplified?</li> <li>If the bandwidth of the channel is 5 Kbps, how long does it take to send a frame of 100,000 bits out of this device?</li> <li>The light of the sun takes approximately eight minutes to reach the earth. What is the distance between the sun and the earth?</li> </ol>	<p>Marks 12 CLO 1</p>
	(b)	<p>A signal has eight data levels with a pulse duration of 2 ms. Calculate the pulse rate and bit rate.</p>	<p>Marks 02 CLO 1</p>

Q No 1 (a)

1) Soln-

$$\text{Data Rate} = 100 \text{ kbps}$$

$$\text{frequency} = 0 \text{ kHz} = P=1$$

$$\text{frequency} = 50 \text{ kHz} = 0.5 \times 10^3$$

$$\text{frequency} = 100 \text{ kHz} = 100 \text{ kHz} \div 100 \text{ kHz} = 1$$

2) Solutions-

$$a) \quad F_s = 2 \times F_m = 2 \times 200 = 400 \text{ k samples/s}$$

low pass signal the min frequency  
there fore we have

$$F_{\text{max}} = 0 + 200 = 200 \text{ kHz}$$

$$f_s = 2 \times 200,000 = 400,000$$

b) A band pass signal with bandwidth  
of 200 kHz if the lowest frequency  
is 100 kHz.

$$F_{\text{max}} = 100 + 200 = 300 \text{ kHz}$$

$$F_s = 2 \times 300,000 = 600,000 \text{ samples/s}$$

Q No 1 a)

3)

sol

a) Calculate the bit rate of the digitized signal.

In a low pass signal - the min frequency is 0 therefore we can say

$$f_{\max} = 0 + 200 = 200 \text{ kHz}$$

$$f_s = 2 \times 200000$$

$$= 400000 \text{ samples/s}$$

the number of bits per sample and the bit rate are

$$n_b = \log_2 1024 = 10 \text{ bits/sample}$$

$$= 400 \text{ kHz} \times 10 = 4 \text{ Mbps}$$

b) the value of  $n_b = 10$

$$\text{SNR}_{\text{dB}} = 6.02 \times n_b + 1.76$$

$$61.96$$

c) the value of  $n_b = 10$  the min bandwidth can be calculated as

$$B_{\text{PCM}} = n_b \times B_{\text{analog}}$$

$$= 10 \times 200 \text{ kHz}$$

$$= 2 \text{ MHz}$$

4) Solutions:-

$$\text{Bandwidth} = 200 \text{ kHz}$$

$$= 200000 \text{ Hz}$$

The Max data rate can be calculated as


$$N_{\text{max}} = 2 \times B \times n_b$$

$$= 2 \times 200000 \times \log_2 4$$


$$= 8 \times 10^4 \text{ bps}$$

800 kbps.

Part (a)

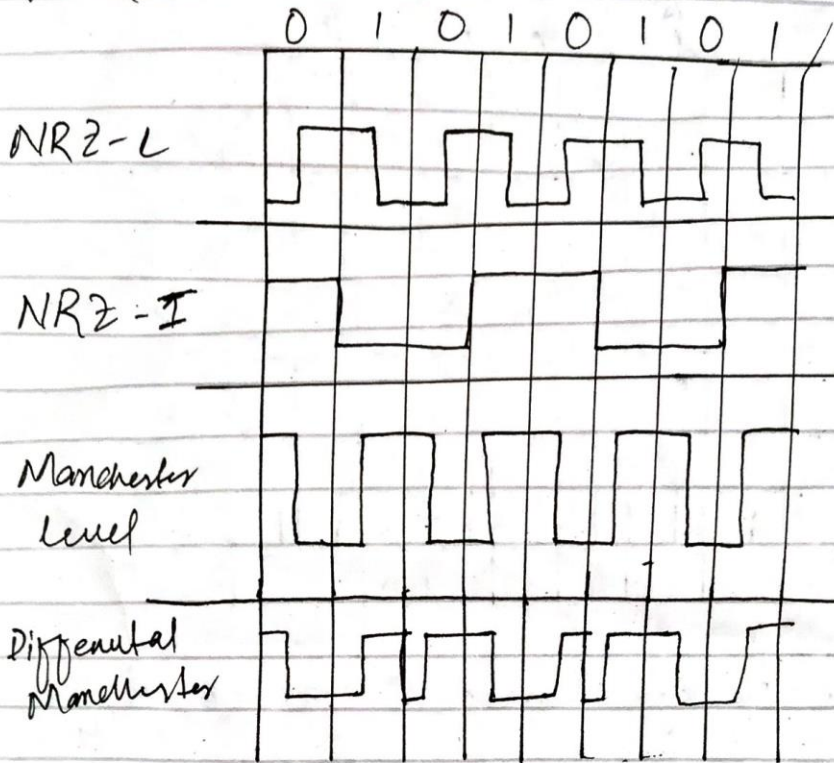

Part (b)

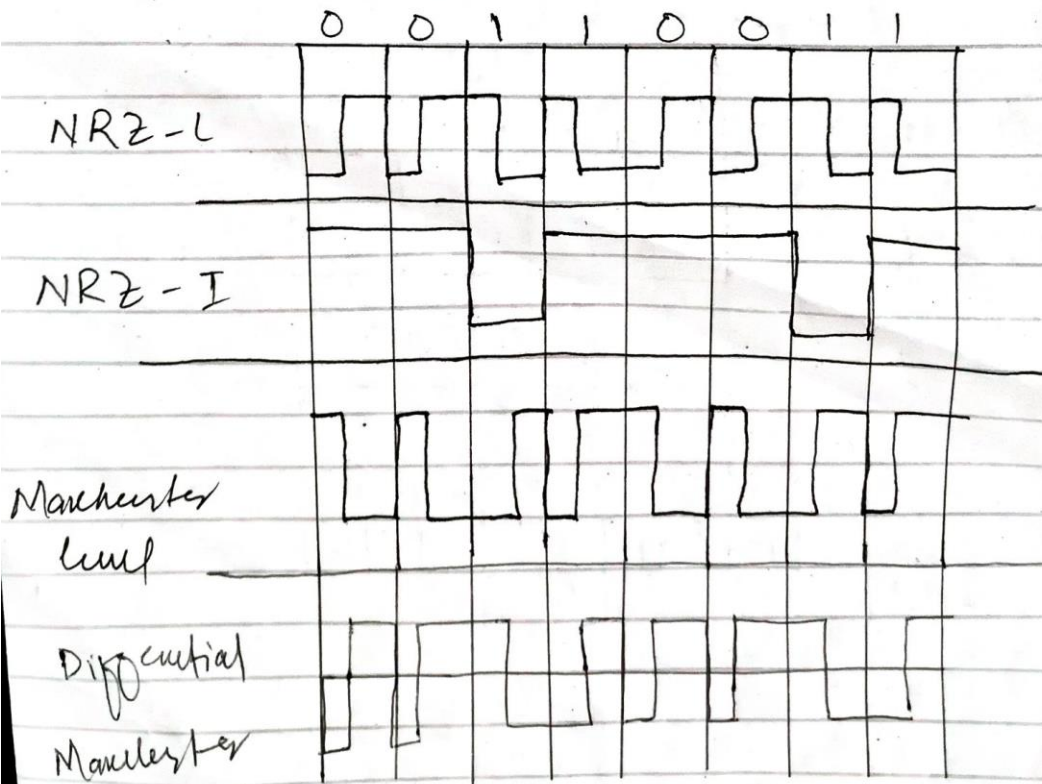

Q.No3 part a):- A tv channel has a bandwidth of 6MHz if we send a digital signal using one channel what are the data rates if we use one harmonic, three harmonics and five harmonics?

Sol:- BW = 6MHz

1) BW from 0Hz to first harmonic = 6MHz;  
Bit rates =  $2 * \text{first harmonics} = 2 * 6 = 12 \text{ Mbps}$ .

2) BW from 0Hz to 3rd harmonic = 6MHz

3rd harmonic =  $3 * \text{first harmonic}$

first harmonic =  $6 \text{ MHz} / 3 = 2 \text{ MHz}$

Bit rate =  $2 * \text{first harmonic} = 2 * 2 = 4 \text{ Mbps}$ .

3) BW from 0Hz to 5th harmonic = 6MHz.

first harmonic =  $6 \text{ MHz} / 5 = 1.2 \text{ MHz}$

Bit rate =  $2 * \text{first harmonic} = 2 * 1.2 = 2.4 \text{ Mbps}$ .

Q.No3

2) A signal travel from point A to point B. At point A the signal power is 100W. At point B the power is 90W. What is the attenuation in decibels?

Sol:- Attenuation of a signal =  $10 * \log \left( \frac{\text{input power}}{\text{output power}} \right)$

Here the point A is the input power  
power at point B is output power

Therefore

$$\text{Attenuation in dB} = 10 \cdot \log \left( \frac{100}{90} \right) \\ = 0.457575 \text{ dB.}$$

3) The attenuation of the signal is -10 dB what is the final signal power if it was originally 5W?

Soln:

$$\text{dB} = 10 \log_{10} \frac{P_2}{P_1} \quad -10 = 10 \log_{10} \frac{P_2}{5}$$

$$\log_{10} \frac{P_2}{5} = -1$$


$$\frac{P_2}{5} = 10^{-1}$$

$$P_2 = 0.5 \text{ W}$$

4) A signal has passed through three cascaded amplifiers, each with a 4 dB gain. What is the total gain & how much the signal Amplified?

Soln:

$$\text{Total gain} = 4 \text{ dB} + 4 \text{ dB} + 4 \text{ dB} = 12 \text{ dB}$$



for power gain of the first stage

$$dB = 10 * \log_{10} \frac{P_2}{P_1}$$

$$\frac{P_2}{P_1} = \left( 10^{\frac{4}{10}} \right) = 2.512$$

for power gain of three stages

$$2.512 * 2.512 * 2.512 = 15.851.$$

5) :- If the bandwidth of the channel is 5 kbps how long does it take to send a frame of 100,000 bits out of this device?

Sol :-

Given

bandwidth 5000 bps, frame 100,000 bit

$$\Rightarrow \frac{100,000 \text{ b}}{5000 \text{ bps}} = 20 \text{ sec.}$$

6) :- The light of the sun takes approximately eight minutes to reach the earth. What is the distance between the sun and earth?

Sol :- The exact time taken by light to reach the earth from sun is 18 minutes and 20 seconds i.e. total 1100 seconds.



page 8

Speed of light in vacuum is

$$= 3 \times 10^8 \text{ m/s}$$

$$\text{Speed} = \frac{\text{distance}}{\text{time}}$$

$$\text{distance} = \text{Speed} \times \text{time}$$

$$\text{distance} = 3 \times 10^8 \times 500$$

$$= 150,000,000,000 \text{ meters.}$$

or

$$150,000,000 \text{ Kilometers.}$$

Q No 3 part b)

A signal has eight data levels with a pulse duration of 2ms. calculate the pulse rate and bit rate.

Solution:-

$$\text{Pulse Rate} = \frac{2}{2 \times 10^{-3}} =$$

$$2 \times 10^{-3} = 0.002$$

$$\frac{2}{2 \times 10^{-3}} = 1000 \text{ pulses/s.}$$

$$\text{Bit Rate} = \text{Pulse Rate} \times \log_2 l$$

$$= 1000 \times \log_2 8 = 1500$$