

NAME: HIDAYAT UR RAHMAN


ID: 15125

BS (SE) 4th SECTION (B)


SUB: Computer Communication & Networks (Lab)

SIR: MANSOOR QADIR


ANS:1,2,3,4

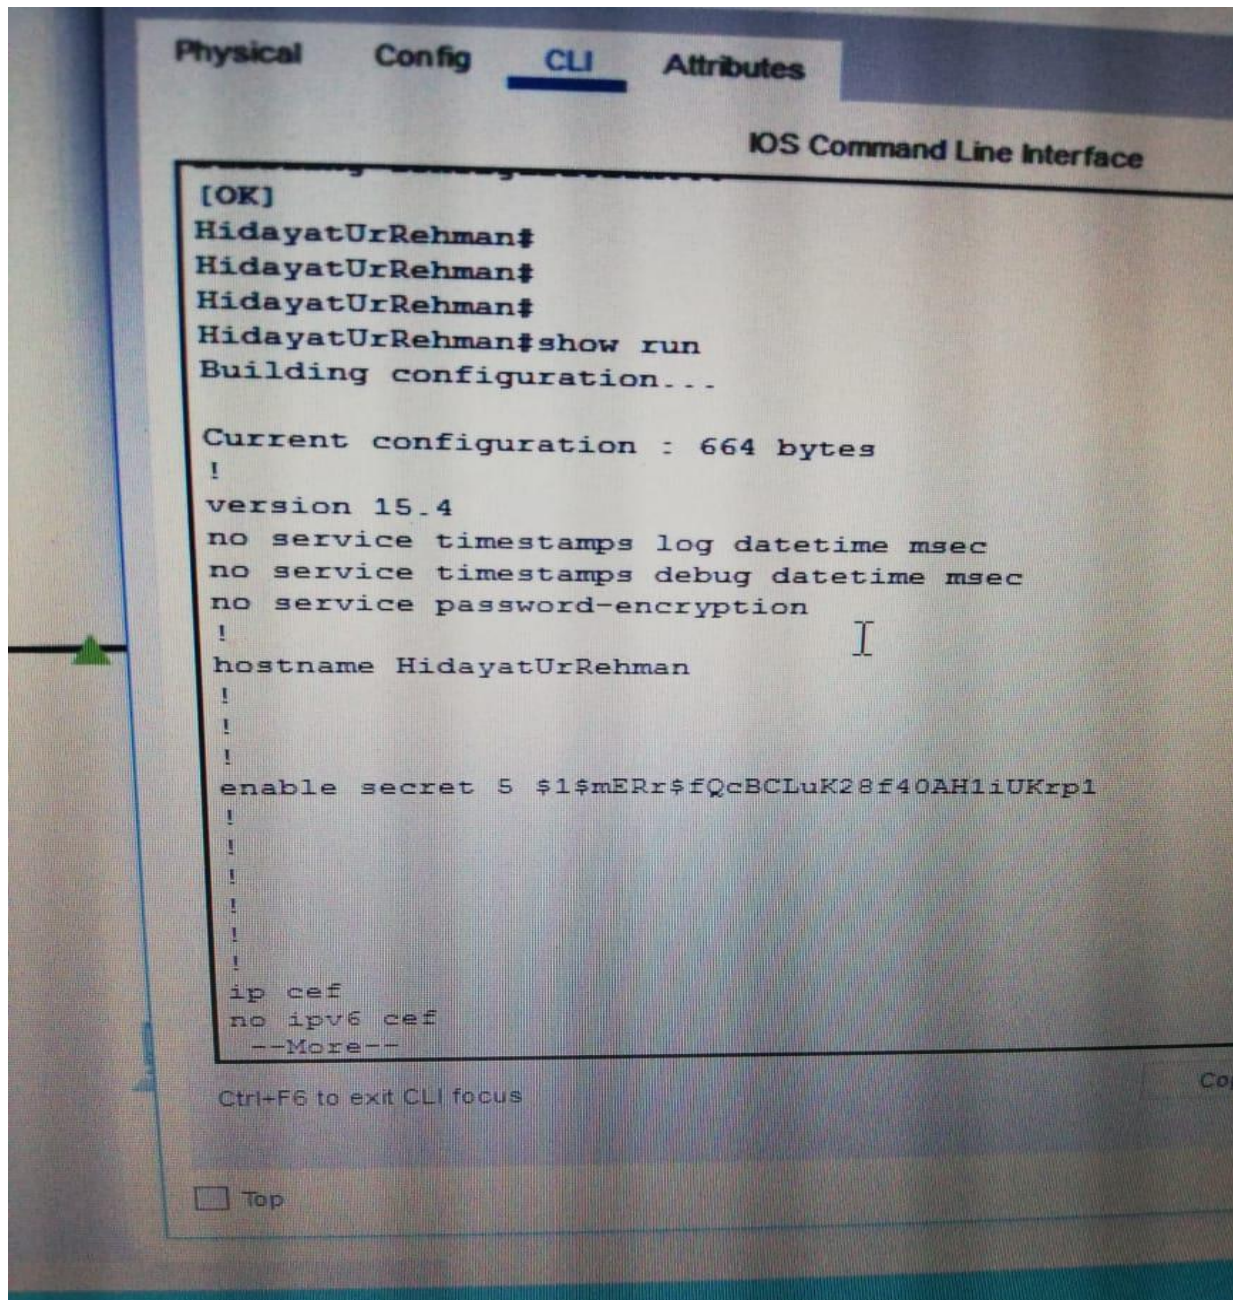


ANS:5

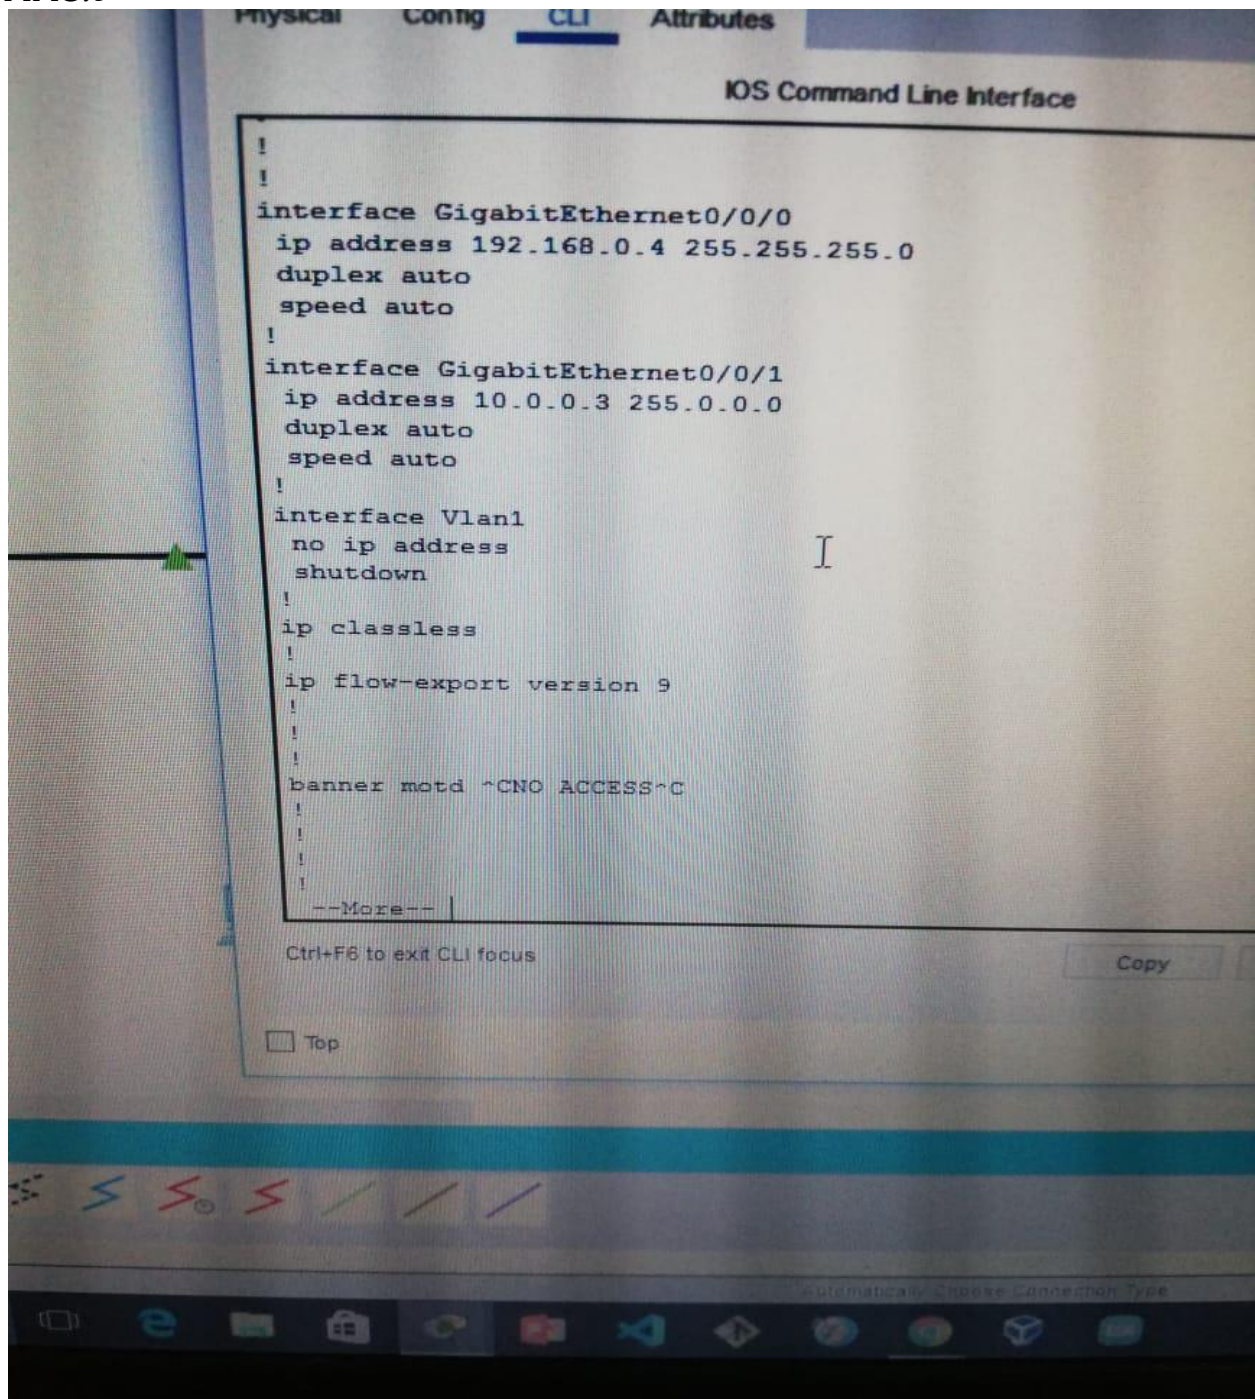

ANS:7

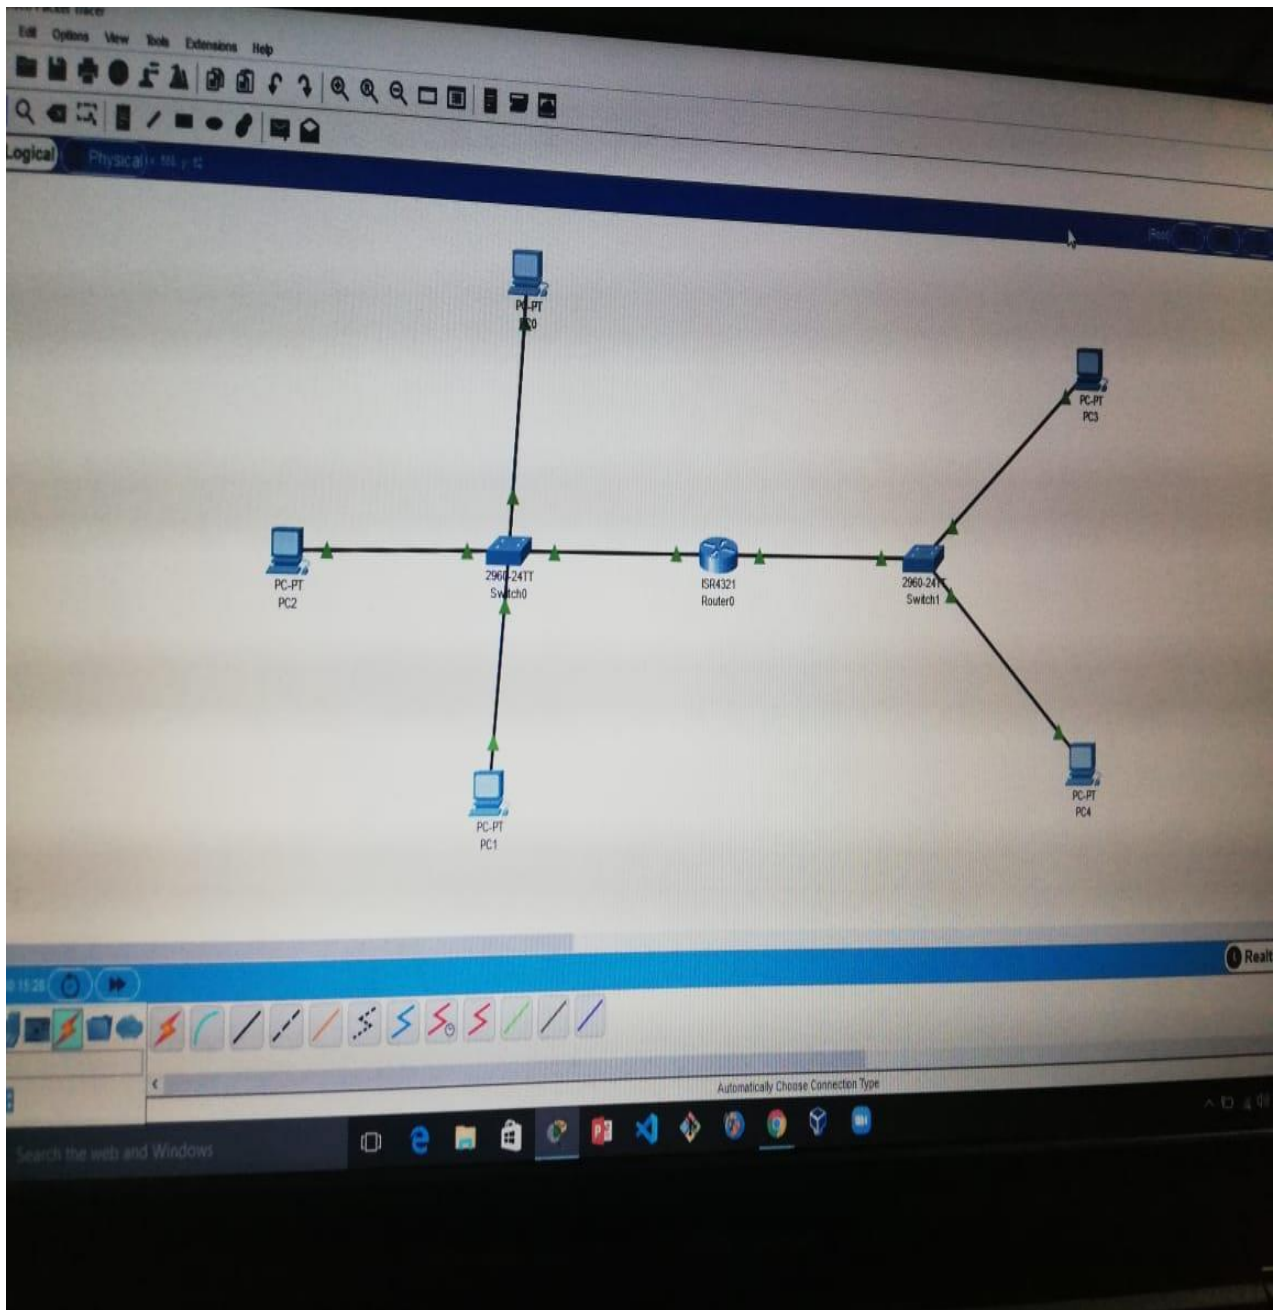

ANS: 8



Programming Attributes

et0

Static

192.168.0.1

255.255.255.0

192.168.0.4


0.0.0.0

Auto Config


Static

FE80::201:96FF:FE89:6079


AD5

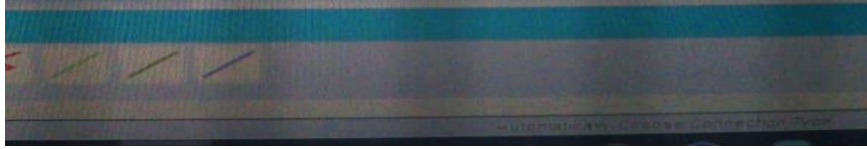

ANS:9

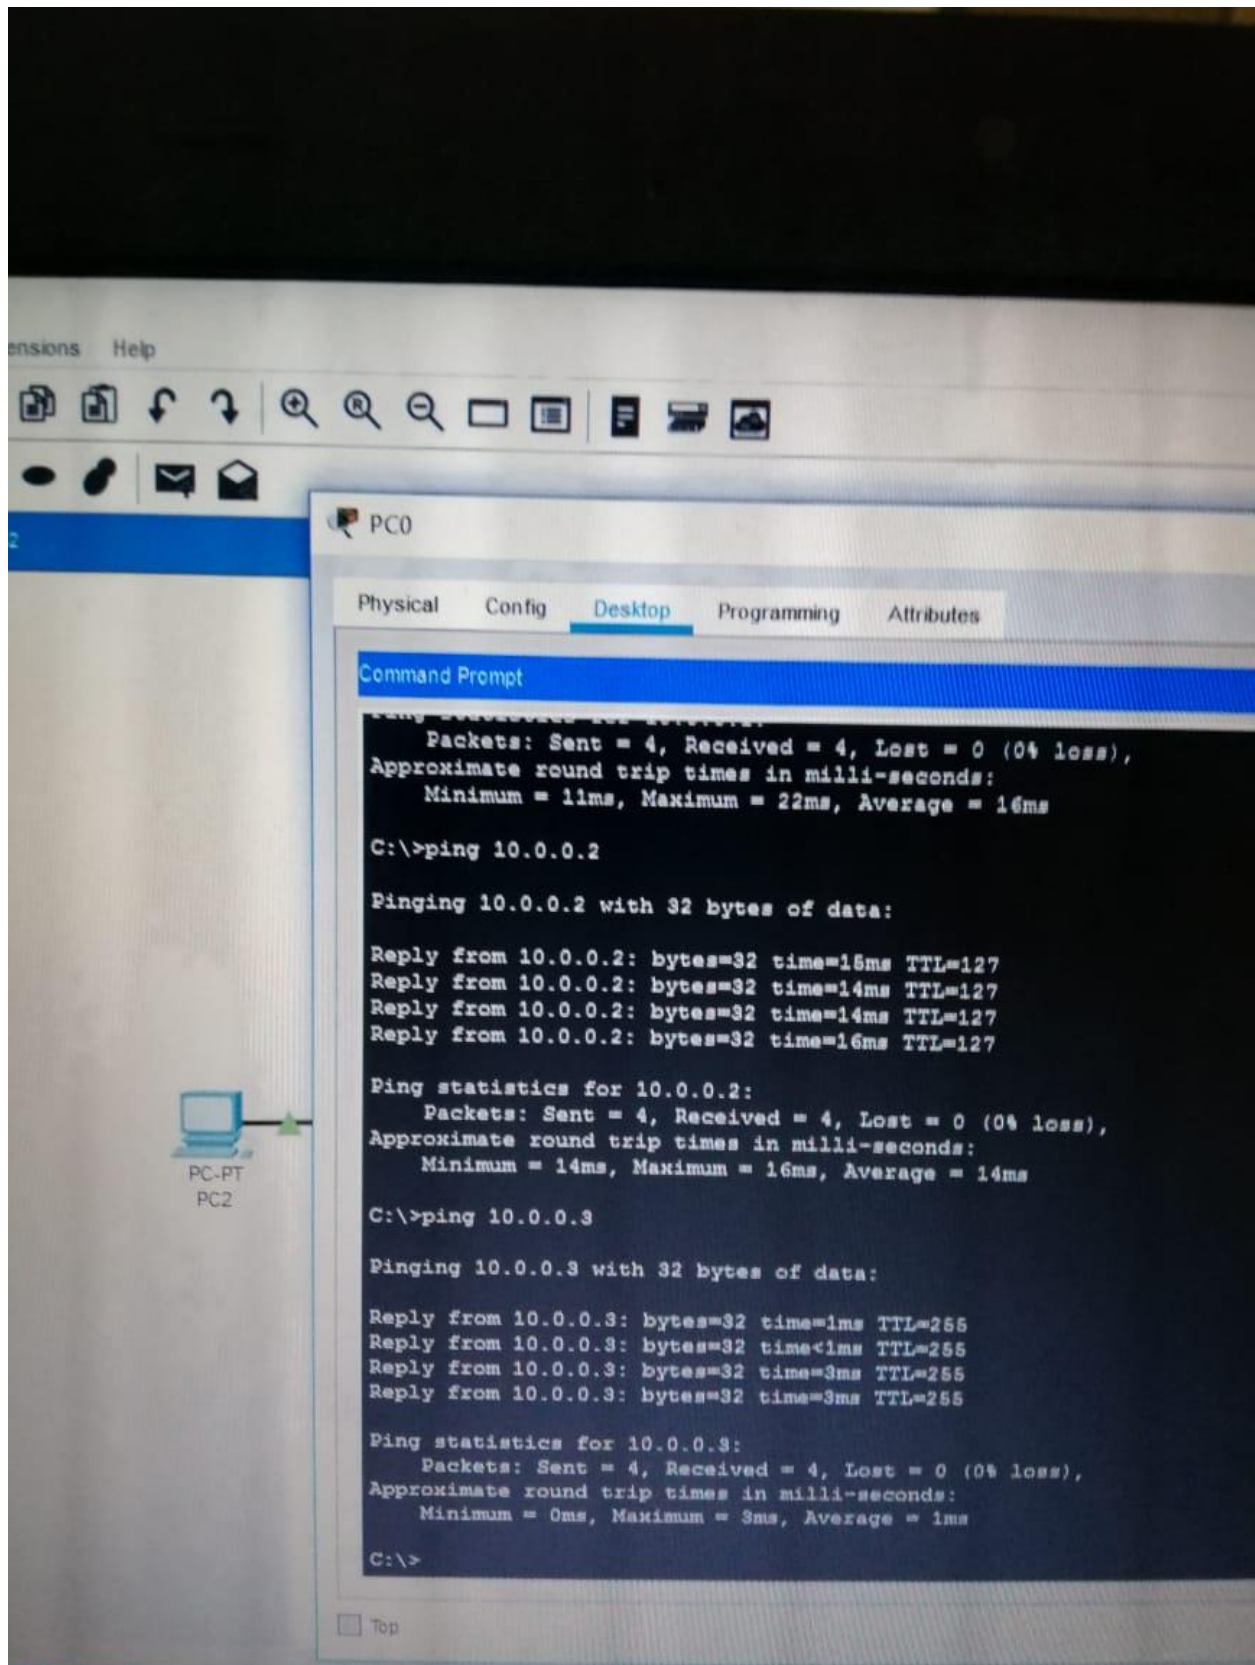

ANS: 10

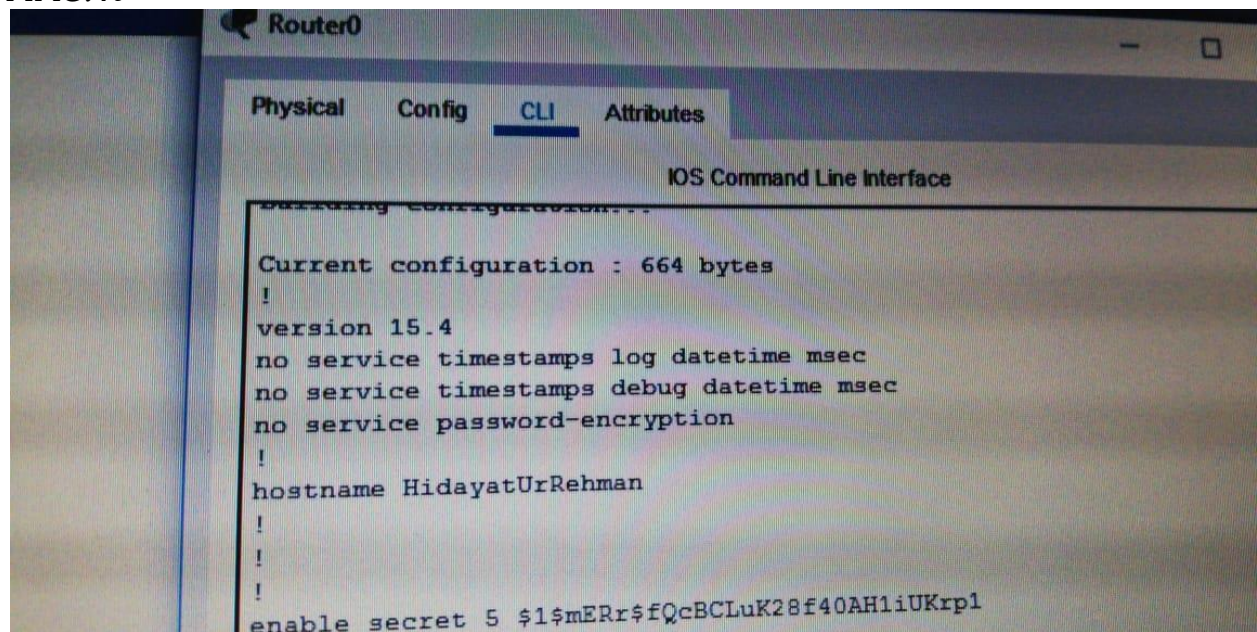

The screenshot shows a web-based interface for a Cisco Router0. The top navigation bar includes 'Physical', 'Config', 'CLI' (which is selected and underlined), and 'Attributes'. Below this, the title 'IOS Command Line Interface' is displayed. The main content area shows the current configuration of the router, which is 664 bytes long. The configuration text is as follows:

```
Building Configuration...  
Current configuration : 664 bytes  
!  
version 15.4  
no service timestamps log datetime msec  
no service timestamps debug datetime msec  
no service password-encryption  
!  
hostname HidayatUrRehman  
!  
!  
!  
enable secret 5 $1$mERr$fQcBCLuK28f40AH1iUKrp1
```