

# "SESSIONAL ASSIGNMENT"

Name : M. Zakaria Salem

ID : 14459

Subject : Data Communication And  
Network

Program : BS (SE)

Semester : 4<sup>th</sup> (A)



### Question Number 1:

In the OSI model, each layer uses the services of the layer below it and provides service to the above layer. The primary function of the data link layer is to provide a well-defined service interface to the network layer above it.

### Types of Services:

The data link layer offers three types of services.

#### \* Unacknowledged Connectionless Services:

The data link layer of the sending machine sends independent frames off to the data link layer of the receiving machine. The receiving machine does not acknowledge receiving the frame. No logical connection is setup between the host machines. Error and data loss is not handled in this service. This is applicable in Ethernet services and voice communication.



★ Acknowledged Connectionless Services:

No logical connection is setup between the host machine, but each frame sent by the source machine is acknowledged by the destination machine on receiving.

If the source does not receive the acknowledgement within a stipulated times then it resends the frames. This is used in wifi services.

★ Acknowledged Connection-Oriented Service:


This is the best service that the data link layer can offer to the network layer. A logical connection is setup between the two machines and the data is transmitted along this logical path.

The service has three ~~different~~ distinct phases.

- ➔ Setup of connection
- ➔ Sending frames
- ➔ Release connection



Question Number 3 :

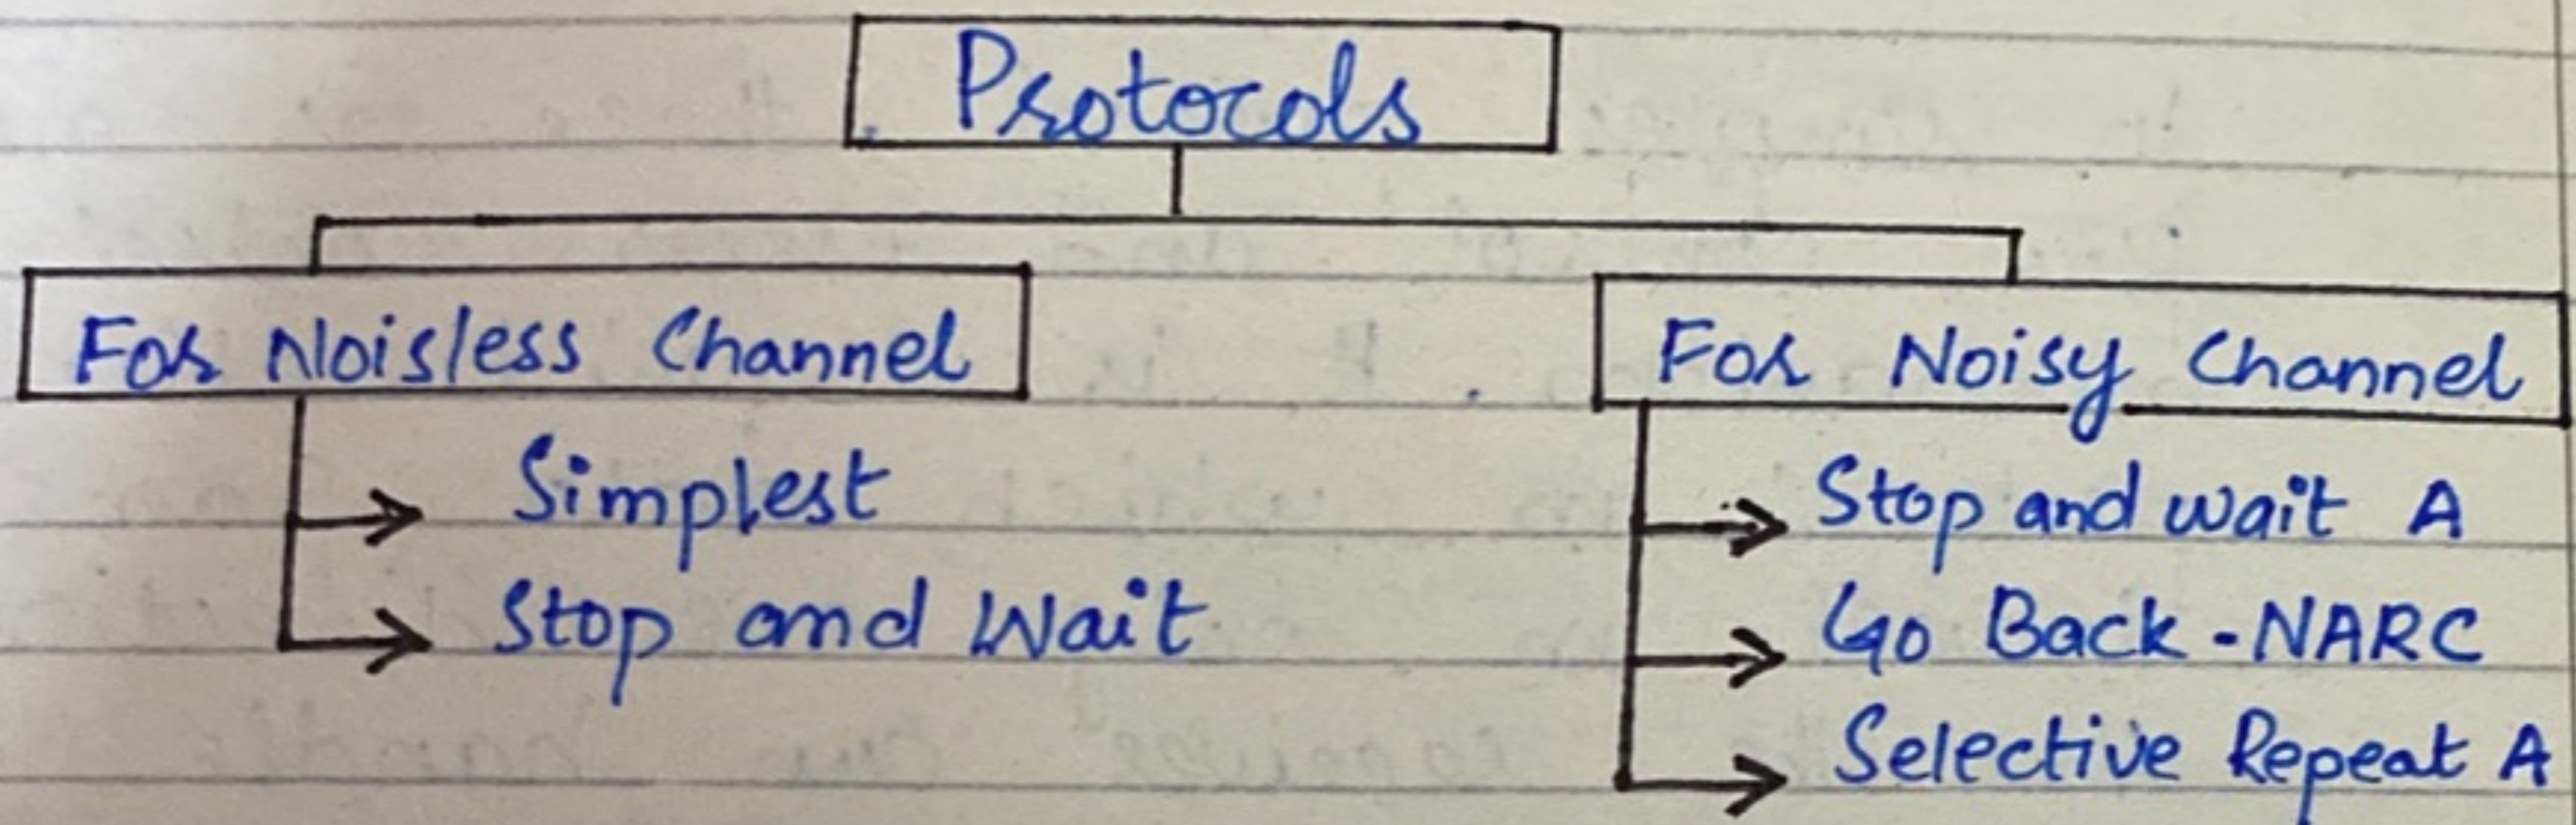

★ Noisy Channels :

Although the stop and wait protocol gives us an idea of how to add flow control to its predecessor, noiseless channels are nonexistent. We discuss three protocols in this section that use error control.

- Stop and wait automatic Repeat Request
- Go Back-N automatic Repeat Request
- Selective Repeat automatic Repeat Request

★ Noiseless Channels :

An ideal channel in which no frames are lost, duplicated or corrupted is regarded as noiseless channel.



\* Simplest Protocol :

In simplest protocol, there is no flow control and error control mechanism. It is a unidirectional protocol in which data frames travel in only one direction.

Also the receiver can handle any received frame with a processing time that is small enough to be negligible.

Question Number # :

Communications are mostly full-duplex in nature, i.e. data transmission occurs in both directions. A method to achieve full-duplex communication is to consider both the communication as a pair of simplex communication. Each link comprises a forward channel for sending data and a reverse channel for sending acknowledgments.

However, in the above arrangement, traffic load doubles for each data unit that is transmitted. Half of all data transmission of



Page # 5

acknowledgments.

So, a solution that provides better utilization of bandwidth is piggy backing.

Question Number 5:

In multistage switching, blocking refers to times when one input cannot be connected to an output because there is no path available between them. All the possible intermediate switches are occupied. One solution to blocking is to increase the number of intermediate switches based on the close criteria.



## Question Number 7:

These techniques of digital to digital conversion. Line coding, Block coding and scrambling. Line coding is always needed, Block coding and scrambling may or may not be needed.

### \* Line Coding:

- Line coding is the process of converting digital data to digital signals.
- Line coding converts a sequence of bits to a digital signal.
- At the sender, digital data are encoded into a digital signal; at the receiver; the digital data are recreated by decoding the digital signal.

## Question Number 8:

### Signal Element Vs Data Element:

- In data communications our goal is to send data elements.



- A data element is the smallest entity that can represent a piece of information, this is the bit.
- In digital data communication, a signal element carries data elements.
- A signal element is the shortest unit of a digital signal.
- Data elements are being carried; signal elements are the carriers.

### Data Rate :

The data rate defines the number of data elements (bits) sent in 1s.  
The unit is bits per second (bps)

### Signal Rate :

The signal rate is the number of signal elements sent in 1s. The unit is the pulse rate / modulation rate or simply baud.

### Question Number 11 :

The IPv4 addresses we use are all used to seeing are made up of four numerical octets that combine to



form a 32 bit address. IPv6 addresses look nothing like IPv4 addresses. In IPv6 addresses are 128 bits in length and are made up of hexadecimal characters.

- In IPv4 each octet consists of a decimal number ranging from 0 to 255. These numbers are typically separated by periods.
- In IPv6, addresses are expressed as a series of eight 4-character hexadecimal numbers, which represent 16 bits each (for a total of 128 bits)

### Question Number 19 :

- Classless addressing and classful addressing refer to two different ways to think about IP addresses. Both terms refer to a perspective on the structure of a submitted IP address. Classless addressing uses a two-part view of IP addresses and classful addressing has a three part view with classful addressing. The address always has an 8-, 16- or 24-bit network field, based on the class A, B and C addressing rules.



- The end of the address has a host part that uniquely identifies each host inside a subnet. The bits in between the network and host part comprise the third part, namely the subnet part of the address with classless addressing, the network and subnet parts from the classful view are combined into a single part often called the subnet or prefix with the address ending in the host part.

### Question Number 13 :

The 32 bits IP address is divided into five sub-classes. These are ;

- \* Class A
- \* Class B
- \* Class C
- \* Class D
- \* Class E

Each of these classes has a valid range of IP addresses.

⇒ Class A, B and C are used for unicast communication.



- ⇒ Class D is for multicast communication.
- ⇒ Class E addresses are reserved for special purposes.

### Question Number 14 :

An IP address has two components, the network address and the host address. A subnet mask separates the IP address into the network and host addresses.

Subnetting further divided the host part of an IP address into a subnet and host ~~part~~ address. If additional subnetwork is needed, use the subnet calculator to retrieve subnetwork information from IP address and subnet mask. It is called a subnet mask because it is used to identify network address of an IP address by performing a bitwise and operation on the netmask.

A subnet mask is a 32 bit number that makes an IP address, and divides the IP address into network address and host address. Subnet mask is made by setting network



bits - to all "1"s and setting host bits to all "0"s. Within a given network, two host addresses are reserved for special purpose, and cannot be assigned to hosts. The "0" address is assigned a network address and "255" is assigned to a broadcast address and they cannot be assigned to hosts.

### Question Number 15 :

An address in slash notation (CIDR) contains all information we need about the block, the first address (Network address) the number of addresses and the last address.

These pieces of information can be as following.

The number of addresses in the block can be found as  $N = 2^{32-n}$  in which  $n$  is the prefix length and  $N$  is the number of address in the block.

The first address (network address) in block can be found by ANDing the address with the network mask.



Question Number 16 :

NAT :

NAT stands for network address translation. It's a way to map multiple local private addresses to a public one before transferring the information. Organizations that want multiple devices to employ a single IP address use NAT, as do most home routers.

How can NAT Help :

Theoretically, there are  $2^{32}$  IPv4 addresses, a little more than 4 billion IPv4 addresses. The number of IPv4 available addresses is actually less than the theoretical number, since some of the addresses in a network are reserved for broadcasting, multicasting or other special purposes, they cannot be assigned to hosts.

With the explosion of devices online, the available IPv4 addresses are just not enough.



Question Number 19 :

129.14.6.8

129		
2	129	Reminder
2	64	= 1
2	32	= 0
2	16	= 0
2	8	= 0
2	4	= 0
2	2	= 0
2	1	= 0

0 (reminder = 1)  
 129 (in decimal) = 10000001 (in binary)

6		
2	6	Reminder
2	3	= 0
2	1	= 1

0 (reminder = 1)  
 6 (in decimal)  
 = 00000110 (in binary)

14		
2	14	Reminder
2	7	= 0
2	3	= 1
2	2	= 1

0 (reminder = 1)  
 14 (in decimal)  
 = 00001110

8		
2	8	Reminder
2	4	= 0
2	2	= 0
2	1	= 0

0 (reminder = 1)  
 8 (in decimal)  
 = 00001000

So in binary conversion, The IP address  
 129.14.6.8 becomes  
 10000001 . 00001110 . 0000110 . 00001000



208.34.54.12

208			34		
2	208	Remainder	2	34	Remainder
2	104	= 0	2	17	= 0
2	52	= 0	2	8	= 0
2	26	= 0	2	4	= 0
2	13	= 0	2	2	= 0
2	6	= 0	2	1	= 0
2	3	= 0	0 (remainder = 1)		
2	1	= 1	34 (in decimal)		
0 (remainder = 1)			= 00100010		
208 (in decimal)					
= 11010000 (in binary)					

54			12		
2	54	Remainder	2	12	Remainder
2	27	= 0	2	6	= 0
2	13	= 1	2	3	= 0
2	6	= 1	2	1	= 1
2	3	= 0	0 (remainder = 1)		
2	1	= 1	12 (in decimal)		
0 (remainder = 1)			= 00001100		
54 (in decimal) = 00110110 (in binary)					

So, in binary conversion the IP address  
 208.34.54.12 becomes  
 11010000.00100010.00110110.00001100



Page # 15

Question Number 20 :

A : 01111111 . 11110000 . 01100111 .  
01111101 :

( 127.240.103.125 )

B. 10101111 . 11000000 . 11111000 .  
00011101 :

( 175.192.248.29 )