

Submitted By : MUHAMMAD
HUSSAIN

Submitted To : ENGR YASEEN
MAHMOOD

Student ID : 7739

Section : "B"

Subject : INTRODUCTION TO
STRUCTURAL DYNAMICS &
EARTHQUAKE ENGINEERING.

Q no 1 :

1

Ans: Figure 1

In figure one the problem occurs due to non continuous load path through the walls from roof to foundation it is very dangerous case and very main issue by overstressing at the point of discontinuity.

The discontinuity shear wall condition represents a special but common case of the soft first story problem.

The purpose of shear wall is to collect all loads of each floor and transmit it to foundation very efficiently due to presence of shear wall the structure will be stable at a time of earthquake and other dynamic forces.

Solution :- If we want to use shear wall then their presence must be recognized from the beginning of schematic design and their size and location made the subject of careful architectural and engineering coordination early.

Qno 1 :

Ans . Figure 2 .

In figure 2 the problem is due to less stiff of ground story the ground level story is less stiff than above the building codes differentiate between soft and weak stories . Soft stories are less stiff the story above .

A weak story at any height creates a problem but since

the cumulative³ loads are greatest towards the base of the building.

The problem will be due to discontinuity between the first and the second floor. It will result to very dangerous result.

Solution:

Soft story effect can be usually reduced by adding new columns, braces and external buttresses in a structure. due to these addition the structure will be more stable. due to these addition soft story will be neglected soft story usually causes drift in a structure which is dangerous and will be controlled by addition of these column, bracing and external buttresses.

Qno 1

Ans:

Figure 3.

A building seismic behavior is strongly influenced by the nature of the perimeter design.

There are two main problems created by these shapes.

The first is that they tend to produce differential movements between different wings of building that because of stiff elements that tend to be located in this region results in local stress concentration at the reentrant corner.


The second problem is torsion. it is due to centre of mass and center of rigidity. in this

Form cannot ^s geometrically coincide for all possible possible earthquake directions. The result will be rotation.

Solution..

There are two different solutions of this problem. The problem can be solved if structurally to separate the buildings into simpler shape.

The second solution is if we tie the building together more strongly with elements to provide a more balanced resistance.

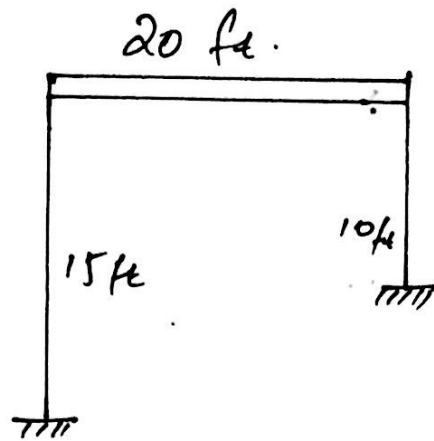

$$E = 29000 \text{ ksi}$$

$$I = 1200 \text{ in}^4$$

$$\text{load} = 7739 \text{ lb/ft}^2$$

Solution:-

$$k_{\text{env}} = k_1 + k_2$$

$$k = 12 EI \left| \frac{1}{(15 \times 12)^2} + \frac{1}{(10 \times 12)^2} \right|$$

$$k = 313.29 \text{ k/in}$$

$$k = 3759 \text{ k/ft}$$

$$\Rightarrow m = \frac{w}{g}$$


$$m = \frac{7.739 \times 20}{32.2 \text{ ft/sec}^2}$$

$$m = 4.80 \text{ k sec}^2/\text{ft}$$

$$m = 4800 \text{ lb sec}^2/\text{ft}$$

$$P(t) = 1 \text{ kV} + m\ddot{u}$$

Part values.

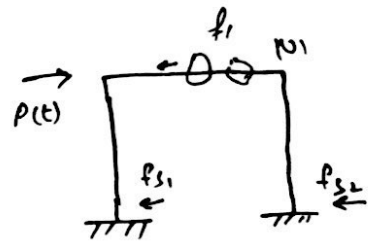

$$P(t) = 4800\ddot{u} + 3.759 \times 10^6$$

So it is equation of
equation.